

DATA SHEET

Cable connector



Part Number

5086.716.JSC.09.233

Description


7/16, Jack, Straight, Cable Mount

Interface Standard

IEC 169-4

Suitable Cable

RG223/U; RG400/U; RG142B/U

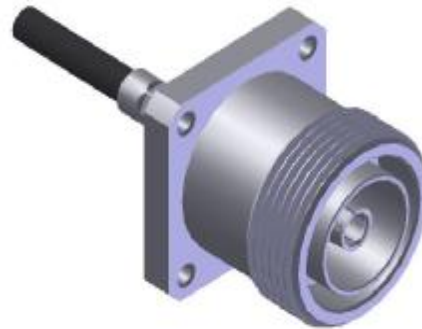

Electrical Data

Impedance	50	Ω		
Max. operating frequency	5	GHz	cable limited	
Frequency range	DC to 1GHz	1 to 2.2GHz	2.2 to 3GHz	3 to 5GHz
VSWR	≤ 1.03	≤ 1.05	≤ 1.08	≤ 1.18
Insertion loss	$0.05 \sqrt{f(\text{GHz})}$	dB		
Insulation resistance	≥ 10000	M Ω		
Center contact resistance	≤ 0.4	m Ω		
Outer contact resistance	≤ 1.5	m Ω		
Dielectric withstanding voltage	≥ 2500	Vrms @ 50Hz	cable limited	
Working voltage	≥ 1000	Vrms @ 50Hz	cable limited	
PIM	$\leq -$	dBc (2x20W carriers)		

Mechanical Data

Mating cycles	≥ 500	
Center contact axial force	≥ 200	N
Center contact axial torque	≥ 0.45	Nm
contact gauge ret. Force	$\geq 6\sim 18$	N
Center contact	solder	
Outer contact	crimp	
Cable retention force	≥ 257.5	N

Environmental Data

Operating temperature	restricted by cable and/or silicone used
2002/95/EC (ROHS)	compliant
Sealing	N/A
Thermal shock	MIL-STD-202 Method107, condition B
Moisture resistance	MIL-STD-202 Method106
Corrosion resistance	MIL-STD-202 Method101, condition B
Vibration	MIL-STD-202 Method204, condition D
Shock	MIL-STD-202 Method213, condition I

Material Data

Piece Parts	Material	Surface Plating
center contact	Phosphor bronze	Ag
body	Brass	CuSnZn
insulator	PTFE	
Ferrule	Brass	CuSnZn

Zeeteq the technoledge connecting people
 No. 51 Sci.-Tech Industry Park, Huoju
 Road, SND, Suzhou, China
 Zip: 215009

Tel: +86 512 6807 8808
 Fax: +86 512 6807 8818
www.zeeteq.com

Rev.: a
 issued: 2008-5-05
 page: 1 of 1