



NOTES: (UNLESS OTHERWISE SPECIFIED)

1. The interface comply with IEC169-10.
2. Part must be packaged to avoid any damages during transportation.

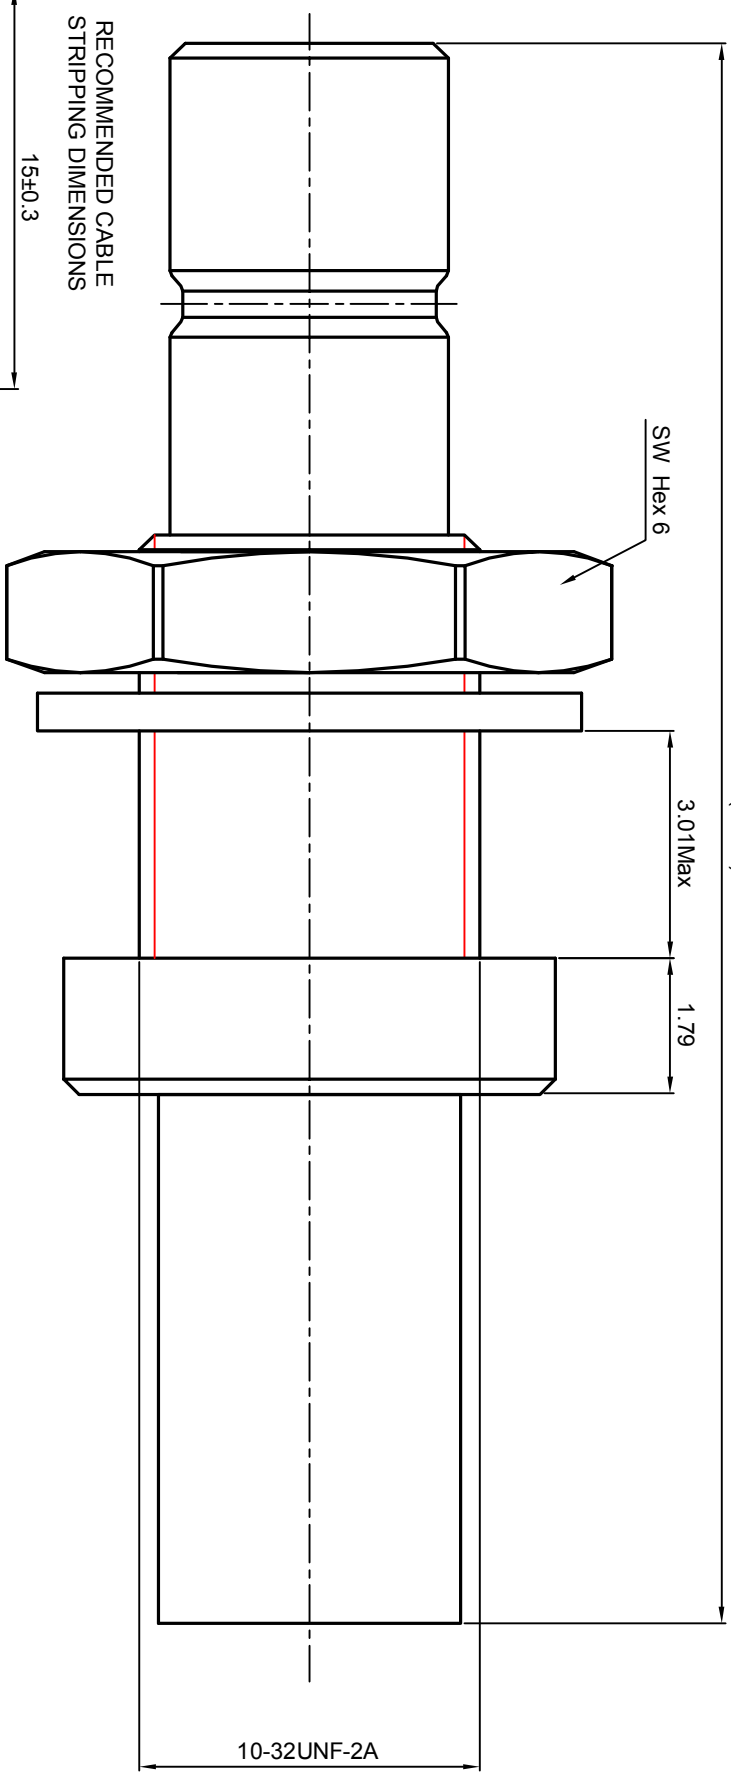

RECOMMENDED CABLE STRIPPING DIMENSIONS

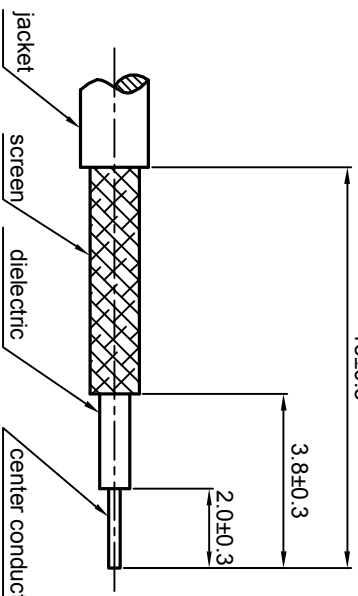

REV.	DESCRIPTION	APPROVED	DATE	ECN

MATERIAL		SEE BOM FOR DETAILS		TOLERANCES		THIRD ANGLE PROJECTION		TITLE	
SEE BOM FOR DETAILS		SEE BOM FOR DETAILS		Opface X ±1 1place X ±0.1 2place .XX ±0.05 Angle ±5°				Zee-teq	
FINISH		Remove burrs and sharp edges		Remove burrs and sharp edges 		GENERAL ECCENTRICITY <input checked="" type="checkbox"/> 0.06		SMB, PLUG, CABLE	
Plating part to be touched by gloves		Dimension apply before plating		DRAWN BY Collin CHECKED BY APPROVED BY		NAME DATE Collin 15NOV07		DWG NO. 5240.SMB.PSC.06.111	
XXX - measuring point for plating		SURFACE		VOLUME		SCALE 10:1		DO NOT SCALE DRAWING	
NOTICE: Those drawings and specifications are the property of ZEEITEQ CORPORATION and used only for the specify purpose authorised by ZEEITEQ								SIZE A4 SHEET 1 of 1	

