



**NOTES: (UNLESS OTHERWISE SPECIFIED)**

1. Mating according to MIL-STD-348A.
2. Part must be packaged to avoid any damages during transportation.
3. After crimping dimension should be AF/SW 3.25.

REV.	DESCRIPTION	APPROVED	DATE	ECN

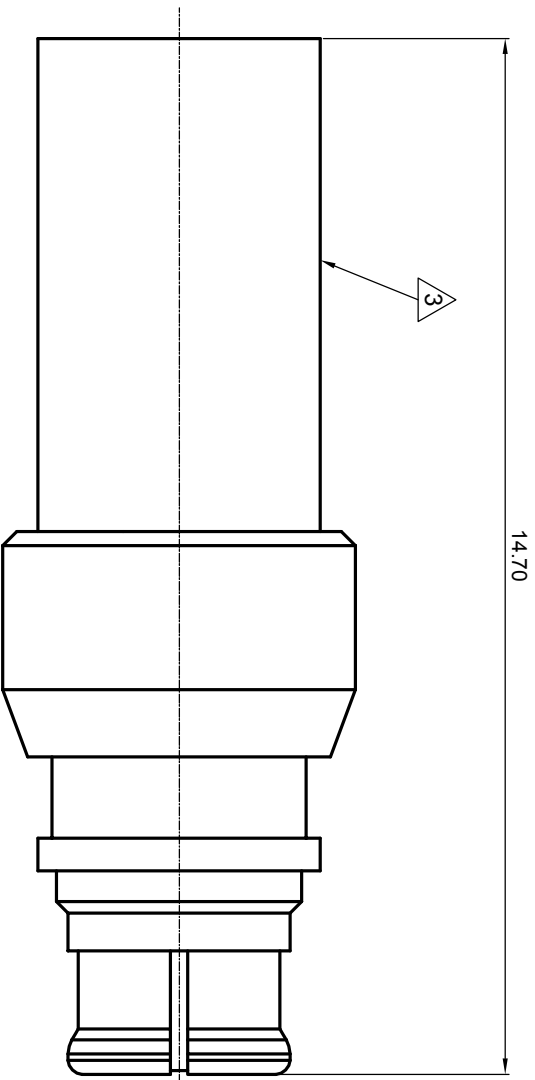

recommended cable stripping dims

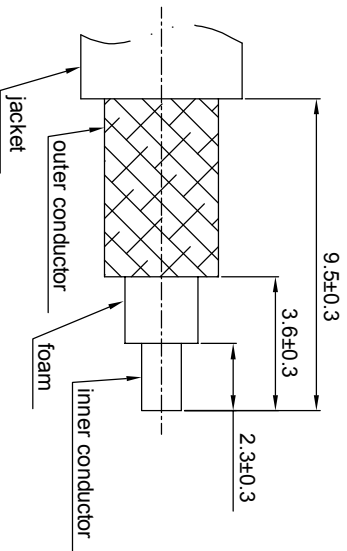

1.6

MATERIAL		SEE BOM		TOLERANCES		THIRD ANGLE PROJECTION		TITLE	
FINISH		SEE BOM		Optical X ±1 1place X ±0.1 2place .XX ±0.05 Angle ±5°					
Plating part to be touched by gloves		Remove burrs and sharp edges				GENERAL ECCENTRICITY <input checked="" type="checkbox"/> 0.06		SMP, Jack, cable	
Dimension apply before plating		DRAWN BY		NAME		DATE		DWG. NO.	
XXX - measuring point for plating		Joy Zhou		12Nov07		APPROVED BY		5116.SMP.JSC.06.111	
SURFACE		VOLUME		NOTICE: Those drawings and specifications are the property of ZEETEQ CORPORATION and used only for the specify purpose authorised by ZEETEQ		SCALE		REV.	
10:1		DO NOT SCALE DRAWING		SIZE		A4		SHEET	
1 of 1		1 of 1							