

DATA SHEET

Cable connector



Part Number

5063.N.JSC.11.133

Description


N, Jack, Bulkhead, Cable Mount

Interface Standard

IEC 60169-16

Suitable Cable

UT165/U RG8A/U RG213/U

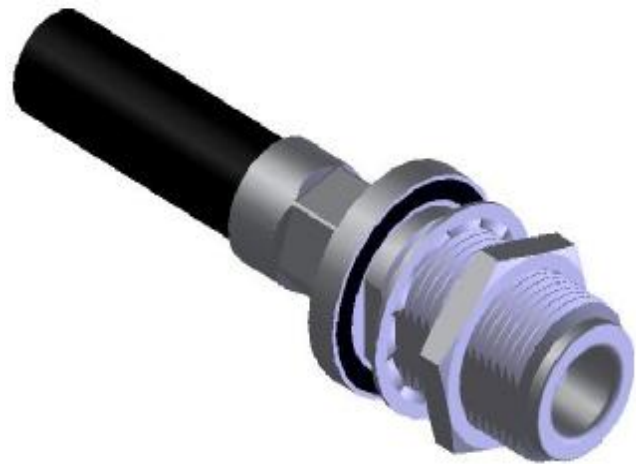

Electrical Data

Impedance	50	Ω	
Max. operating frequency	3	GHz	cable limited
Frequency range	DC to 1GHz	1 to 2.2GHz	2.2 to 3GHz
VSWR	≤ 1.04	≤ 1.05	≤ 1.06
Insertion loss	$0.03\sqrt{f(\text{GHz})}$	dB	
Insulation resistance	≥ 5000	M Ω	
Center contact resistance	≤ 1	m Ω	
Outer contact resistance	≤ 0.25	m Ω	
Dielectric withstanding voltage	≥ 2500	Vrms @ 50Hz	connector limited
Working voltage	≤ 1000	Vrms @ 50Hz	connector limited

Mechanical Data

Mating cycles	≥ 500	
Center contact axial force	≥ 28	N
Center contact axial torque	≥ 0.03	Nm
contact gauge ret. Force	≥ 0.56	N
Center contact	solder	
Outer contact	crimp	
Cable retention force		
-UT165/U	≥ 250	N
-RG8A/U RG213/U	≥ 423	N

Environmental Data

Operating temperature	restricted by cable and/or silicone used
2002/95/EC (ROHS)	compliant
Sealing	IP68 (IEC60529)
Thermal shock	MIL-STD-202 Method107, condition B
Moisture resistance	MIL-STD-202 Method106
Corrosion resistance	MIL-STD-202 Method101, condition B
Vibration	MIL-STD-202 Method204, condition D
Shock	MIL-STD-202 Method213, condition I

Material Data

<u>Piece Parts</u>	<u>Material</u>	<u>Surface Plating</u>
center contact	Phosphor bronze	Au
outer contact	Brass	CuSnZn
insulator	PTFE	
Ferrule	Brass	CuSnZn
Nut	Brass	CuSnZn
Lock washer	Stainless steel	Passivated
O-ring	silicone rubber	

Zeeteq the technology connecting people

No. 51 Sci.-Tech Industry Park, Huoju
Road, SND, Suzhou, China
Zip: 215009

Tel: +86 512 6807 8808
Fax: +86 512 6807 8818
www.zeeteq.com

Rev.: a
issued: 2008-4-29
page: 1 of 1