
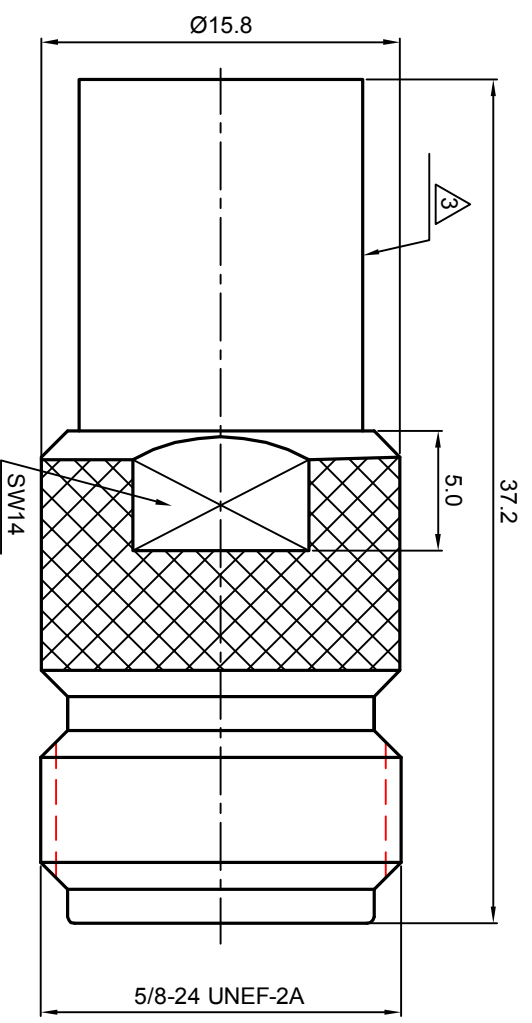


NOTES: (UNLESS OTHERWISE SPECIFIED)

1. The interface comply with IEC169-16
 2. Part must be packaged to avoid any damaged during transportation
- ⚠ After crimping dimension should be AF/SW 10.9.

RECOMMENDED CABLE STRIPPING DIMENSIONS

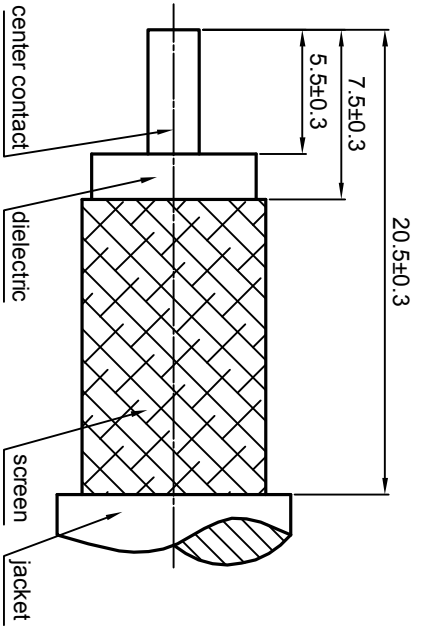

1.6

REV.	DESCRIPTION	APPROVED	DATE	EON

MATERIAL		SEE BOM FOR DETAILS		THIRD ANGLE PROJECTION		TITLE	
FINISH		SEE BOM FOR DETAILS		GENERAL ECCENTRICITY		N, JACK, CABLE MOUNT	
TOLERANCES		Opface X ±1 1place X ±0.1 2place XX ±0.05 Angle ±5°				Zee-teq	
REMOVE BURRS AND SHARP EDGES		Remove burrs and sharp edges 		NAME Danny.D DATE 22OCT07		DWG. NO. 5066.N.JSC.12.133	
SURFACE		VOLUME		APPROVED BY		SCALE	
Plating part to be touched by gloves						3:1	
Dimension apply before plating						DO NOT SCALE DRAWING	
XXX - measuring point for plating						SIZE	
						A4	
						SHEET	
						1 of 1	
						REV.	
						S1	