
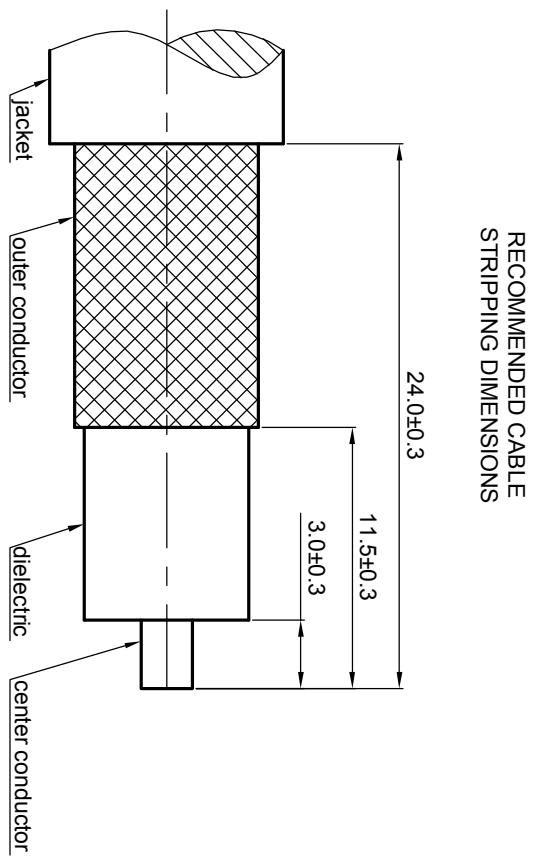


**NOTES: (UNLESS OTHERWISE SPECIFIED)**

1. Interface comply with IEC 169-16.
  2. Part must be packaged to avoid any damaged during transportation.
- A** After crimping dimension should be AF/SW 10.90.

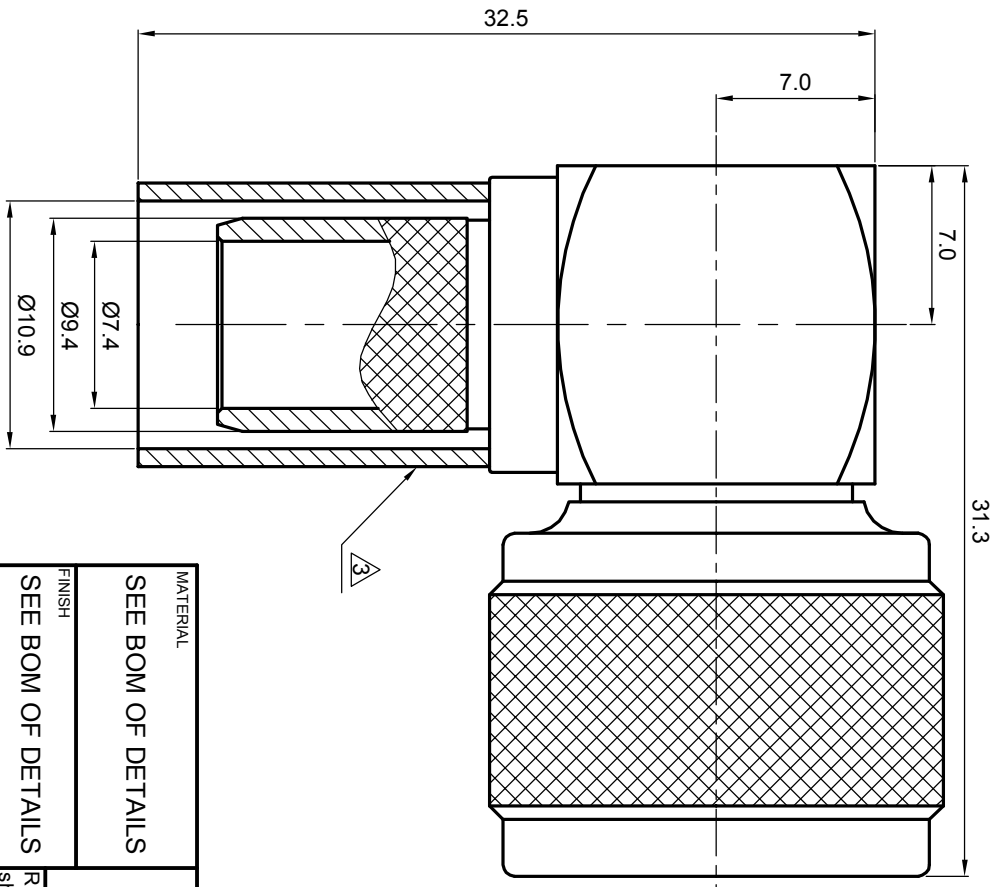

RECOMMENDED CABLE STRIPPING DIMENSIONS

REV.	DESCRIPTION	APPROVED	DATE	ECN
A	REL. TO PRODUCTION	Johnny	18Jul08	ECN_08_034

MATERIAL		TOLERANCES		THIRD ANGLE PROJECTION		TITLE	
SEE BOM OF DETAILS		Opface X ±1 1place .X ±0.1 2place .XX ±0.05 Angle ±5°				<b>Zeeteq</b>	
FINISH		Remove burrs and sharp edges		GENERAL ECCENTRICITY		DWG NO. <b>5053.N.PRC.11.133</b>	
SEE BOM OF DETAILS				<input checked="" type="checkbox"/> 0.06		N, plug, cable	
Plating part to be touched by gloves		DRAWN BY		NAME		DATE	
Dimension apply before plating		Danny.D		22Nov07			
XXX - measuring point for plating		CHECKED BY		APPROVED BY			
SURFACE		VOLUME		SCALE		DO NOT SCALE DRAWING	
				3:1		SIZE A4	
				REV.		SHEET 1 of 1	
				A			

